


Updated!

Fast & Easy

Field Installed Test Port from Fab-Tech

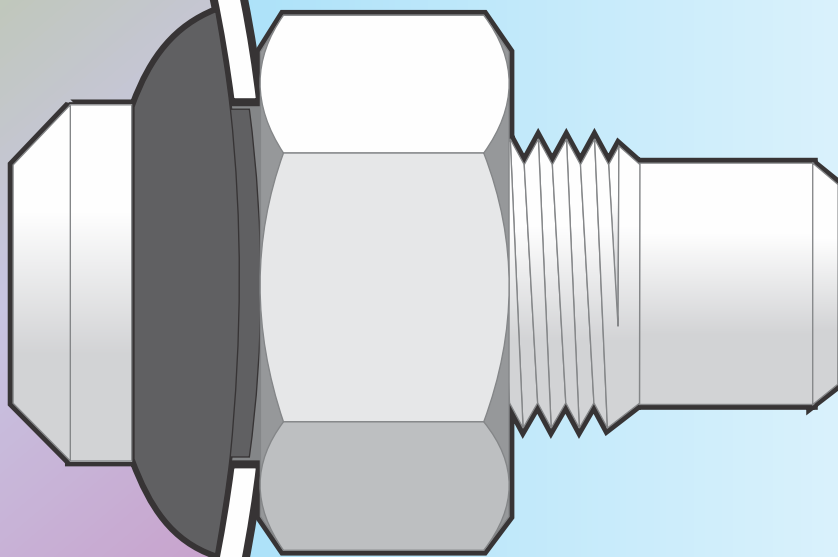


Drill,
Insert,
Seat,
Tighten,
Tap
It's that easy!

The unique handle design of this test port allows it to be installed quickly and easily in-the-field with common tools and without system **shutdown** or **disassembly!**






Fab-Tech, Inc.

A Critical Process Systems Group Company

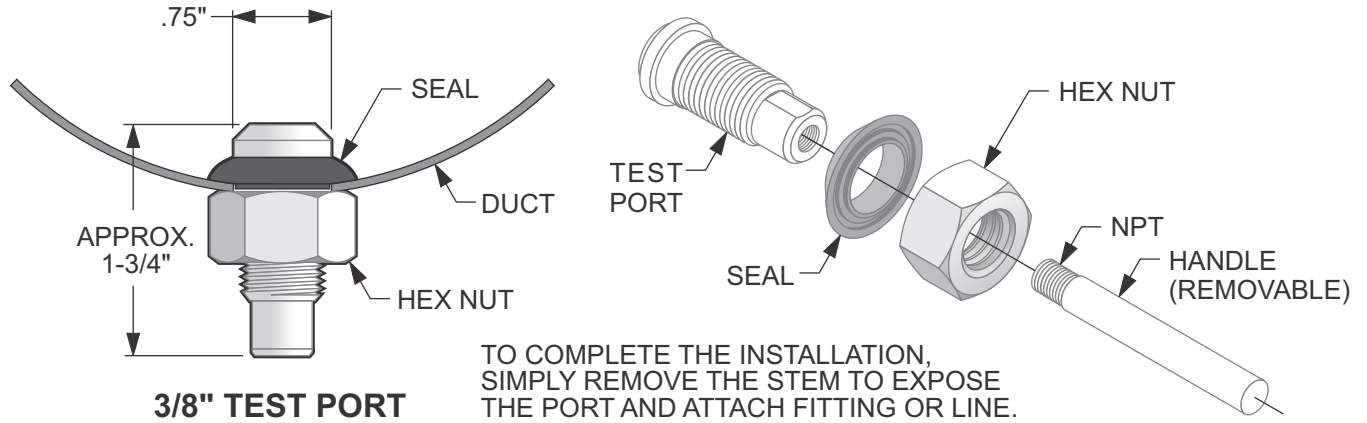

PART NO.	DESCRIPTION	MIN. HOST DUCT	THRU HOLE	REDRILL	I.D. TAP HOLE
FTFI38TP	3/8" TEST PORT	2" DIA. DUCT MIN.	1/4" DIA.	3/8" MAX	1/16" NPT
FTFI34TP	3/4" TEST PORT	6" DIA. DUCT MIN.	1/2" DIA.	3/4" MAX	1/4" NPT
FTFI20TP	2" TEST PORT	12" DIA. DUCT MIN.	9/16" DIA.	1-3/4" MAX	3/8" NPT

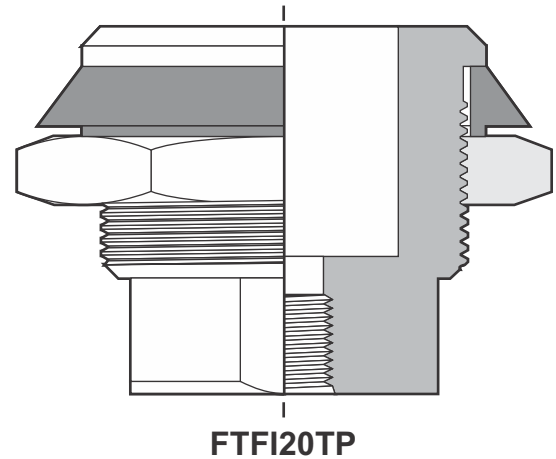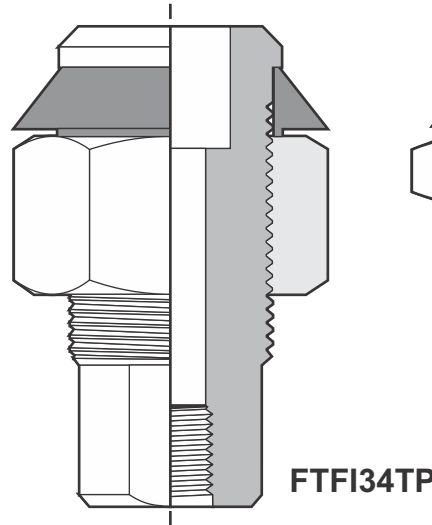

SPECIFICATIONS

Nipple made of pure PVDF, seal made of Viton®

Stainless steel hex nut

Able to redrill through hole to slightly larger hole or drill and tap test port for female threads

Installs in duct as small as 2" diameter using the 3/8" field installed test port

Provides liquid tight seal - does not compromise the integrity of the duct interior coating

Contact us today for more information:

Call: **802-655-8800**

Fax: **802-655-8804**

Website: **www.fabtechinc.com**

Email: **sales@fabtechinc.com**



Fab-Tech, Inc.

A Critical Process Systems Group Company

Fab-Tech, Inc.

480 Hercules Drive

Colchester, VT 05446-6800 USA

PSP® is a registered trademark of Fab-Tech, Inc.

Technical information contained in this document is subject to change without notice.